


AB-100

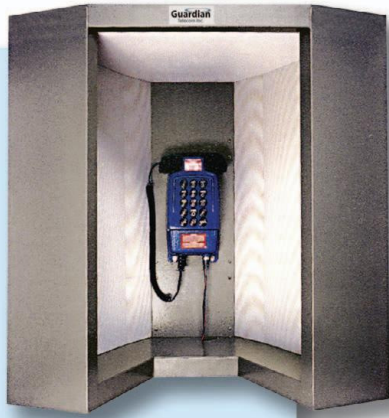

AB-1000

The sound proofing qualities of these acoustic booths greatly enhance communication in areas with high background noise levels, while protecting the apparatus and user from the elements.

ACOUSTIC BOOTHS

AB-100

(Sheet Aluminum)

AB-1000

(Glass Reinforced Plastic)

FEATURES and BENEFITS

AB-100 – Sheet Aluminum

- Sheet Aluminum construction, powder coated
- Acoustic insulation: Noise Attenuation -24 dB
- Convenient writing shelf
- Metal mounting brackets included
- Can be used both indoors and outdoors

AB-1000 – Glass Reinforced Plastic

- Lightweight fiberglass reinforced laminate construction
- Noise Attenuation up to -23 dB
- Standard color-Yellow. (Optional colors available to customers specifications on larger quantity orders)
- Completely maintenance free, UV and corrosion resistant, impervious to chemical attack
- Convenient writing shelf with drainage hubs to prevent water accumulation
- Perforated stainless steel liner
- Encapsulated strong points to securely mount stations and accessories
- Can be used both indoors, outdoors and offshore

APPLICATIONS

- Refineries
- Aerospace
- Factories
- Mines
- Steel mills
- Offshore platforms (AB-1000 only)
- Nuclear facilities
- Bulk loading stations
- Drilling rigs
- Chemical plants
- Any high noise industrial location and more . . .

ACCESSORIES and OPTIONS

Each Acoustic Booth can be fitted with a Guardian telephone suited for specific needs and requirements, and equipped with:

- Strobe Light
- SR40 explosion proof speaker/ringer, speaker or ringer (up to 110 dB)
- CE20 explosion proof line powered ringer (up to 97 dB)



Strobe

CE20


SR40 / SR60



**Enhancing Communication
Through Innovation
And Expertise**

OVERALL DIMENSIONS – AB-100 Acoustic Booth (Sheet Aluminum)

Body Construction	14 Ga Aluminum Outer Shell	
Body Dimensions (H x W x D)	36" x 36" x 31" (914 x 914 x 788 mm)	
Net Weight	90 lbs (41 kg)	
Shipping Weight	w/o pallet 105 lbs (47.7 kg)	w/pallet ¹ 135 lbs (61.3 kg)
Shipping Dimensions ¹ (L x W x D)	w/o pallet 40.0" x 35.0" x 37.0" (102 x 89 x 94 cm)	
	Size w/pallet depends on size of pallet	
Finish	Hammered Grey – Powder Coated	
Liner	White – Zinc Dichromate Plated & Powder Coated	
Acoustic Insulation	2" (50.8mm) Semi-rigid	
Standard Mounting	Vertical Wall	
Optional Mounting	Pole or Stanchion Mount Bracket	

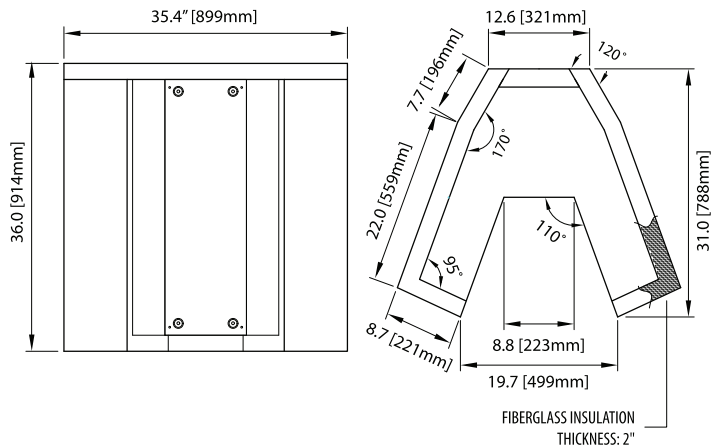


ORDERING INFORMATION

Warranty: One year parts and labor

Order Number	Description				Noise Attenuation (Up to)
	Shell	Perforated Galvanized Steel Liner	Fully Insulated		
P9010	●	●	●		-24 dB

OVERALL DIMENSIONS – AB-1000 Acoustic Booth (Glass Reinforced Plastic)

Body Construction	Polyester/Fiberglass Reinforced Laminate Construction	
Net Weight	Shell 45 lbs (20.4 kg)	Urethane 46.5 lbs (21.1 kg)
		Fully Lined 57.0 (25.9 kg)
Shipping Weight		
Shell	w/o pallet 53 lbs (24.1 kg)	w/pallet ¹ 88± lbs (40.0± kg)
Urethane	w/o pallet 54.5 lbs (21.1 kg)	w/pallet ¹ 89.5± lbs (40.6± kg)
Fully Lined	w/o pallet 65 lbs (29.5 kg)	w/pallet ¹ 100± lbs (34.0± kg)
Shipping Dimensions ¹ (L x W x D)	29.0" x 25.0" x 29.0" (74 x 64 x 74 cm)	
	Size w/pallet depends on size of pallet	
Finish	Polyester Gelcoat Moulded into Finish	
Standard Mounting	Vertical Wall	
Standard Color	Yellow. Custom Colors Available ²	

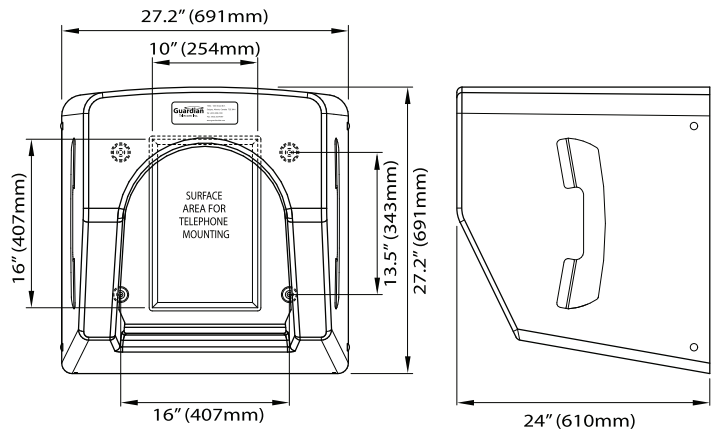

ORDERING INFORMATION

Warranty: One year parts and labor

Order Number	Description				Noise Attenuation (Up to)
	Shell	Urethane Coated Interior	Stainless Steel Liner	Fully Insulated	
P9035	●		●	●	-23 dB
P9037	●	●			-11 dB
P9038	●				-8 dB


ACCESSORIES

All acoustic booths can be fitted with a Guardian Telecom telephone and accessories suited for specific needs and requirements:

- Strobe Lights (Weather resistant, hazardous area and explosion proof)
- SR40 explosion proof speaker/ringer, speaker or ringer (up to 110dB)
- CE20 explosion proof line powered ringer (up to 97 dB)

¹ Actual pallet weight and shipping size varies according to the number of slats, wood thickness, the quantity and volume of fasteners.

² Minimum quantities or premiums may apply. For details on custom options contact a Qmax sales representative.



Qmax pursues a policy of continuous improvement, therefore specifications are subject to change without notice.



Enhancing Communication
Through Innovation
And Expertise

Qmax Group Pty Ltd
Welshpool, Western Australia
Ph: +61 (0)8 9455 4671 Fax: +61 (0)8 6210 1749
Email: info@qmax.net.au Internet: www.qmax.net.au